

TUF STUF™

HIGH PERFORMANCE FLOORING



NO WAX
NO BUFF
EASY TO
CLEAN

WOODLAND PATH™

COMMERCIAL LUXURY VINYL PLANK FLOORING

REALISTIC BEAUTY. DEPENDABLE QUALITY.

TUF STUF™ Woodland Path™ Commercial Luxury Vinyl Plank. Nothing compares to the warm and welcoming appearance of real wood - unless it's **Woodland Path** Luxury Vinyl Plank flooring. Ultrafresh DM-30™ is added to the floor's surface layer to inhibit bacterial growth. And true to its name, **Woodland Path** is available in a wide selection of handsome wood species, ensuring a beautiful foundation for any setting. For more information, contact your Teknoflor sales representative.



ULTRA-REALISTIC

DURABLE AND LOW MAINTENANCE

ENVIRONMENTALLY FRIENDLY

SAFE

OVERALL THICKNESS

WARRANTY

APPLICATIONS

- Manufactured in a wide variety of beautiful and realistic wood species
- Wood pattern film is fused under high pressure between a backing layer and a state-of-the-art wear layer utilizing two coats of UV-cured polyurethane
- Recipient of 2016 ADEX Platinum Award for Design Excellence
- **No Wax, No Buff;** Easily cleaned by damp mopping or auto-scrubbing
- Embossed surface difficult to scuff or scratch
- 20 mil. wear layer for enhanced performance in heavy traffic areas
- Ultrafresh DM-30™ is incorporated into the wear layer which effectively inhibits bacterial growth on the flooring surface
- No buff floors mean no bacteria, dust or wax particles are thrown into the air during cleaning
- No odors from floor finishes or strippers; no wax flushed into sewer system
- 75% post-consumer recycled content • 100% recyclable after use
- ADA Compliant
- Meets fire test standards and is suitable for use in emergency exits and corridors
- 3.0 mm non-cushioned • 20 mil. wear layer
- 15-year commercial warranty
- Ideal for Healthcare, Senior Living, Retail, Corporate/Office, Hospitality, Academic and Educational Environments



WP57218
Verigated Green Ash



WP57516
Seaside Driftwood



WP57518
Sundried Driftwood



WP57111
Stormy Sea Driftwood



WP57014
Black Tupelo Gum



WP57216
Verigated White Ash



WP57295
Natural Ash



WP57201
Medium Choke Cherry



WP57801
Golden Oak



WP57915
Black Cherry Amber



WP57004
Wild Cherry




WP57803
Laurel Oak



WP57802
Santa Fe Oak



WP57116
Malacca Teak




WP57205
Cherrybark Oak




WP57812
Mountain Black Cherry




WP57051
Black Oak




WP57161
Warm Mahogany




WP57112
Santos Rosewood

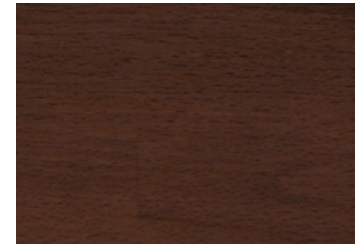

WP57006
Dark Boxelder



WP57313
Burr Oak



WP57099
Peacock Brown



WP52210A
Abacoa

TUF STUF™ WOODLAND PATH™

COMMERCIAL LUXURY VINYL PLANK FLOORING

TECHNICAL DATA

STANDARD SPECIFICATION	ASTM F1700
CLASSIFICATION	CLASS III TYPE B
DIMENSIONS	6" x 36" (36 sf/carton)
OVERALL THICKNESS	3.0 mm Non-Cushioned
WEAR LAYER THICKNESS	20 mils (0.5 mm)
WEAR LAYER COMPOSITION	Virgin PVC wear layer infused with CS TUF STUF Ultimate Performance Technology

FIRE SPECIFICATIONS

CRITICAL RADIANT FLUX	≥ 0.45 watts/cm ² NFPA Class I
SMOKE GENERATION	< 450 DM Corrected Pass
FLAME SPREAD/ SMOKE DEVELOPED	ASTM E84 Class C
FIRE TEST DATA	Complies with NFPA 99 & NFPA 101 Requirements

PERFORMANCE SPECIFICATIONS

ASTM F1700	Standard Specification for Solid Vinyl Floor Tile Exceeds Requirements
CHEMICAL RESISTANCE	Exceeds Requirements No Staining
DIMENSIONAL STABILITY	Exceeds Requirements Does not change linear dimension more than 0.020"/linear foot
FLEXIBILITY	Meets Requirements
STATIC LOAD LIMIT	Exceeds Requirements 1,500 psi at maximum limit
SLIP RESISTANCE	≥ 0.6 SCOF Complies with ADA Guidelines
ABRASION RESISTANCE	34,000 Cycles until design layer visibly affected
CHAIR CASTOR RESISTANCE	Phillips Roll Chair 3.5 @ 20,000 cycles
SCRATCH RESISTANCE	Sim Floor 4.5 out of 5.0
SOUND TRANSMISSION	IIC 48 with floor ceiling assembly
CA 01350 EMISSIONS TESTING	Meets Requirements
RECYCLED CONTENT	75% Post-Consumer Recycled Content - 100% Recyclable After Use



TEKNOFLOR®