

TEKNOFLOR®

HIGH PERFORMANCE FLOORING



NO WAX
NO BUFF
EASY TO
CLEAN

FORESTSCAPES™

LEGACY COLLECTION • COMMERCIAL RESILIENT SHEET FLOORING

LOOKS LIKE THE REAL THING. PERFORMS EVEN BETTER.

Teknoflor® Forestscapes™ Collection. An amazingly hard-working, durable floor that looks exactly like real wood. With 22 wood species represented, construction that's ideal wherever heavy rolling loads are present, and a long track record of proven market performance, **Teknoflor Forestscapes** can provide a solution to every design challenge. Use a single pattern, mix wood tones or combine with other resilient sheet collections to achieve elegant and functional patterns. For more information, contact your Teknoflor sales representative.



ULTRA-REALISTIC

- Digital imaging and high resolution offset printing process
- Embossed texture for heightened realism

DURABLE AND LOW MAINTENANCE

- **No Wax, No Buff;** Easily cleaned by damp mopping or auto-scrubbing
- Embossed surface difficult to scuff or scratch
- Thicker, 2.3mm gauge for enhanced performance in heavy traffic areas
- Maintenance savings result in investment payback in approximately two years

ENVIRONMENTALLY FRIENDLY

- Antimicrobial agent incorporated into the wear layer which effectively inhibits bacterial growth on the flooring surface
- No buff floors mean no bacteria, dust or wax particles are thrown into the air during cleaning
- No odors from floor finishes or strippers; no wax flushed into sewer system
- 52% post-consumer recycled content
- Potentially 1-2 LEEDs points under LEED MR Credit 4.1-4.2

SAFE

- ADA Compliant
- Meets fire test standards and is suitable for use in emergency exits and corridors

OVERALL THICKNESS

- 2.3 mm (0.090")

WARRANTY

- 12-year commercial warranty

APPLICATIONS

- Ideal for Healthcare, Senior Living, Corporate/Office, Retail, Hospitality, Academic and Educational Environments

FORESTSCAPES™

LEGACY COLLECTION • COMMERCIAL RESILIENT SHEET FLOORING

TEKNOFLOR®



31026 Colonial Maple



52209 Beechnut



73802 Light Oak



73801 Honey Oak



73803 Traditional Oak



61022 Virginia Butternut



52206 Fruitwood



31090 Sugar Maple




52202 Harvest Cherry



73804 Dark Oak



52204 Orchard Cherry



31116 Merbau



73805 Natural Oak




31097 Medium Walnut



73901 Arizona Walnut




73903 English Walnut

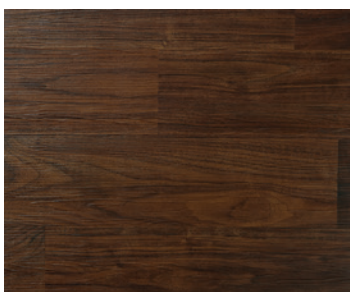


73906 Manchurian Walnut




31111 Brazilian Teak



73904 West Indies Walnut



31112 Rosewood



73902 Brazilian Walnut



52210 Abacoa

TEKNOFLOR® FORESTSCAPES™

LEGACY COLLECTION • COMMERCIAL RESILIENT SHEET FLOORING

TECHNICAL DATA

STANDARD SPECIFICATION	ASTM F1303
CLASSIFICATION	Type I Grade 1
BACKING CLASS	Class A 4-Ply fused backing system comprised of PVC Layer, Fiberglass, PVC Internal Layer and Polyester Woven Back
DIMENSIONS	6' Wide (1.82m) x 75' Long (22.86m)
ROLL SIZE	50 Square Yards/Roll (450 SF)
WEIGHT	5.5 lbs. per Square Yard (295 lbs. per roll)
OVERALL THICKNESS	2.3 mm (0.090")
WEAR LAYER THICKNESS	20 mils
PATTERN REPEAT	23.64"W x 47.28"L (Color #'s 52202, 52204, 52206, 52209, 73801, 73802, 73803, 73804, 73805) 35.46"W x 24.62"L (Color # 61022) 35.46"W x 21.67"L (Color #'s 31026, 31090, 31097, 31111, 31112, 31116, 52210) 70.92"W x 49.25"L (Color#'s 73901, 73902, 73903, 73904, 73906)

FIRE SPECIFICATIONS

ASTM E648 Critical Radiant Flux	≥0.45 watts/cm ² , NFPA Class 1
ASTM E662 Smoke Generation	<450 DM Corrected Flaming & Non-Flaming
FIRE TEST DATA	Complies with NFPA 99 & NFPA 101 Requirements

PERFORMANCE SPECIFICATIONS

ASTM F1303	Standard Specification for Sheet Vinyl Floor Covering with Backing Exceeds Specifications
ASTM F925	Exceeds Requirements
CHEMICAL RESISTANCE	No Staining
ASTM F970	Exceeds Requirements
STATIC LOAD LIMIT	1,000 PSI at maximum limit
ASTM D2047	≥ 0.6 Static Coefficient of Friction
STATIC COEFFICIENT OF FRICTION	Complies with ADA Guidelines
CA 01350	Meets Requirements
FLOORSCORE® CERTIFIED	SCS-FS-01964
ASTM D4060	20,000-28,000 Cycles until design layer visibly affected
TABER ABRASION RESISTANCE	H-18 wheel 1,000 gram load
ANTIMICROBIAL ACTIVITY	Antimicrobial agent incorporated into the wear layer which effectively inhibits bacterial growth on the flooring surface

